




Automatic Swing Door Operator KI-ED100




Specifications


Power supply	110V or 220V-240V
Opening time	3~7s / 90°
Opening and holding time	1-30s
Temperature	-20°C~55°C
Protection level	IP12D
Dimensions	516x105x82mm
Packing box	626x197x152mm
Weight	8.5kg

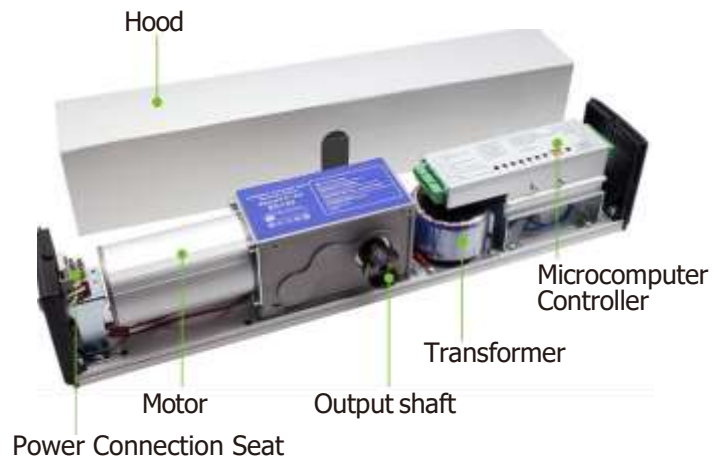


Microcomputer Controller

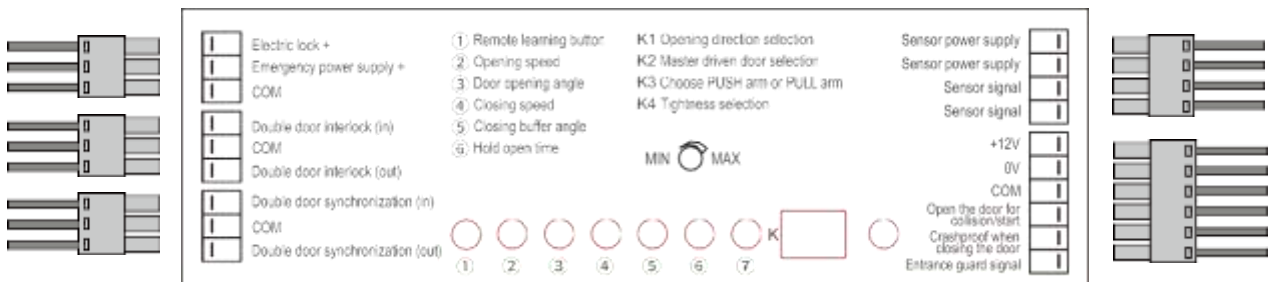


Electromagnetic Lock

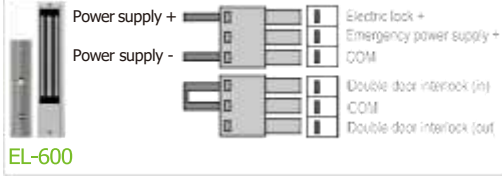

Access Control System


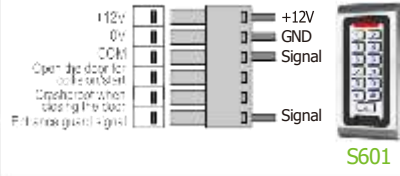


Microwave Sensor


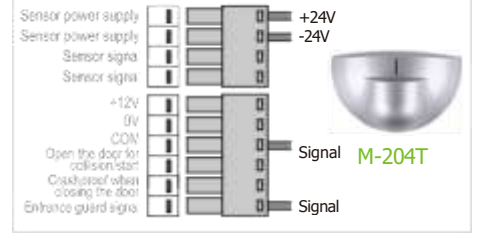


Installation mode

Pull-arm mounting: Suitable for door wing opening inward (drive system inside)

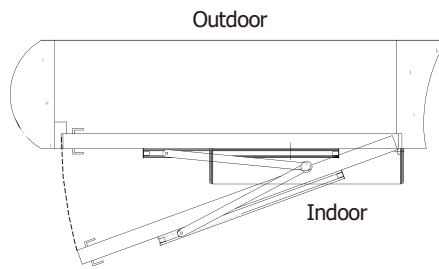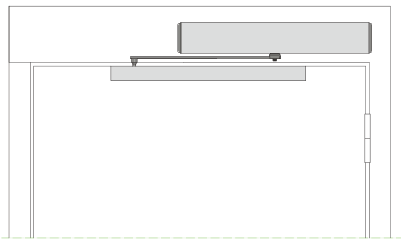

Push Arm Installation: Suitable for door wing opening outward (drive system inside)

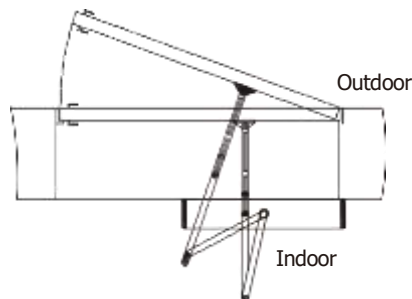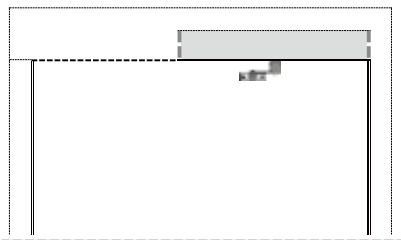

Accessories




Dimensions

L516 x W82 x H105mm



Pull arm

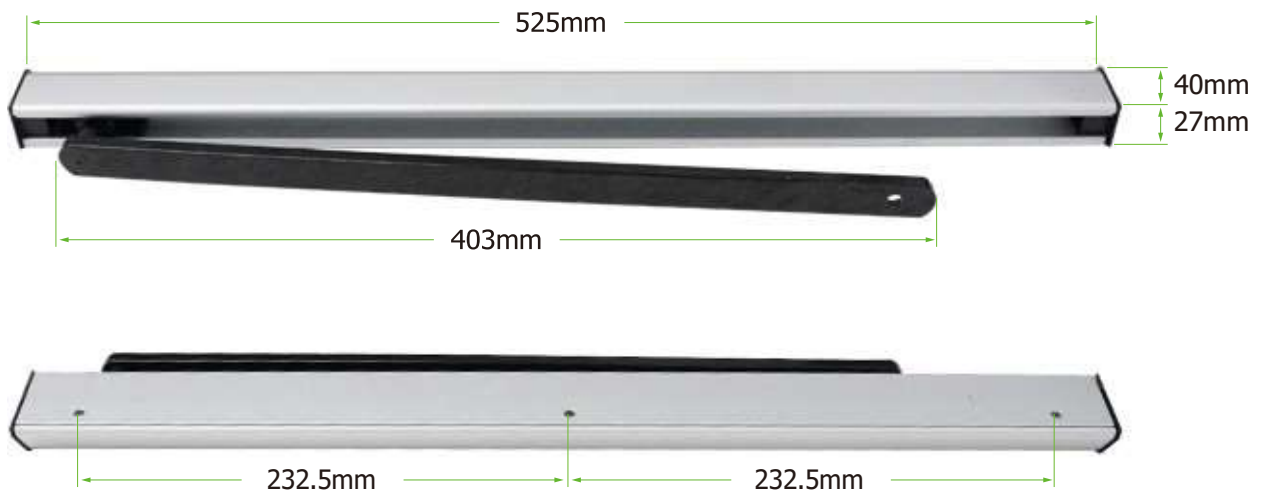

Push arm

